

## Model: KCT-SC50

### Applicable Standard


- Voltage level: 0.3/0.66/0.72 KV.
- Withstand voltage level: 3KV/1Min.
- Rated frequency: 50/60HZ.
- Operating temperature:-25°C~ 55°C.

### Applicable Scenario

- For indoor use; equipped with an anti-trip device at the bottom.
- Applicable cable specifications:  $\phi$ 50mm
- Applicable primary current: 500-1000A.
- Applicable secondary current: 5A/1A.
- Nylon material housing, according to UL94-V0 grade.
- Applicable for wire output, black and white double-wire, black and white stranded wire and sheathed wire optional, length customized.



### Reference Dimensions

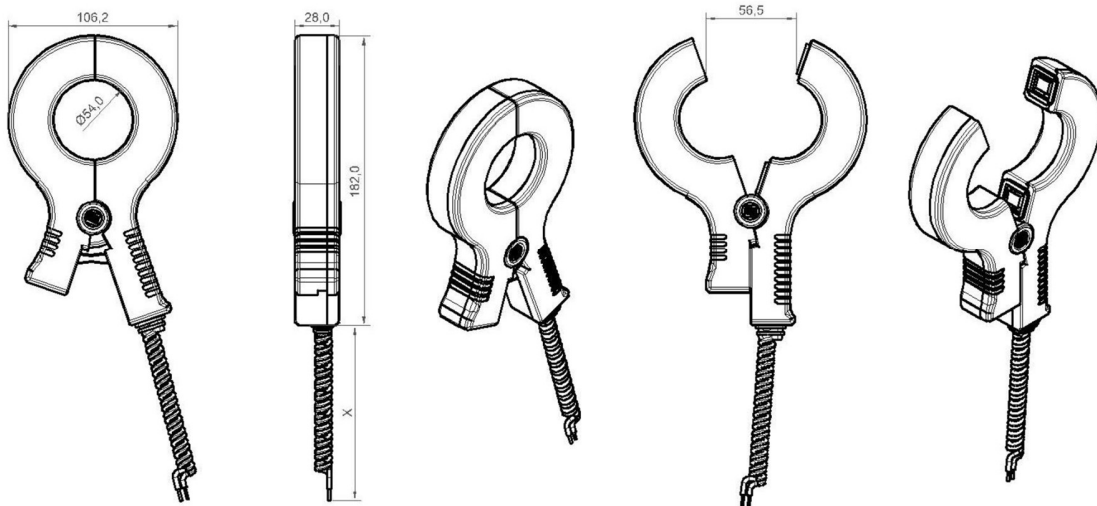

### Reference Performance

Rated current ratio (A)	Accuracy level	Rated load (VA)	Rated current ratio (A)	Accuracy level	Rated load (VA)
500/5	1.0	2.5	500/1	1.0	2.5
600/5	1.0	2.5	600/1	1.0	2.5
800/5	0.5	5.0	800/1	1.0	5.0
1000/5	0.5S	2.5	1000/1	0.5S	5.0